







Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	240Ah@10hr-rate to 1.80V per cell @25°C
Weight	Approx.69.0 Kg (Tolerance±1.5%)
Max. Discharge Current	2400A (5 sec)
Internal Resistance	Approx. 3.6mΩ
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current	72 A
Equalization and Cycle Service	14.6 to 14.8 VDC/unit Average at 25°C
Self Discharge	SPA valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F10
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

Dimensions

Unit: mm Dimension: 522(L) × 240(W) × 223 (H)

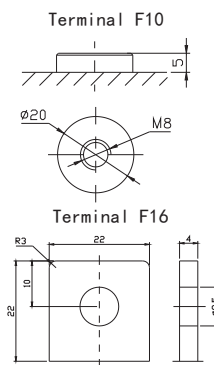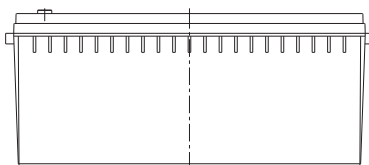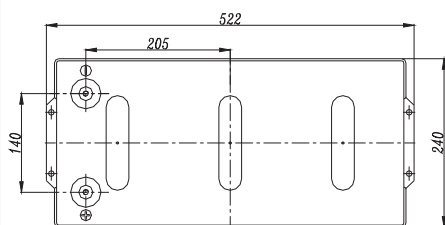

Constant Current Discharge Characteristics: A (25 °C)


F.V/T ime	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	643.4	495.0	404.9	233.9	149.8	92.49	62.85	50.68	42.07	27.71	24.97	13.22
10.0V	624.8	471.0	396.6	230.9	147.8	90.62	61.69	49.96	41.70	27.60	24.73	12.97
10.2V	606.3	454.3	390.4	227.4	146.4	89.67	61.14	49.46	41.42	27.35	24.48	12.73
10.5V	544.4	419.3	371.7	221.1	144.6	88.49	60.60	48.73	41.08	27.11	24.24	12.48
10.8V	491.4	382.3	342.6	213.8	142.6	87.77	59.89	47.06	40.87	27.00	24.02	12.35
11.1V	419.6	341.7	307.3	205.7	139.2	84.24	58.72	46.38	40.58	26.78	23.74	11.85

Constant Power Discharge Characteristics: W(25 °C)


F.V/T ime	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	6654	5272	4454	2677	1736	1084	740.0	606.6	504.0	331.8	299.5	159.3
10.0V	6523	5110	4383	2650	1720	1071	729.0	598.1	499.5	330.5	297.1	156.5
10.2V	6449	4975	4333	2627	1710	1063	725.8	592.5	496.5	328.1	294.5	153.6
10.5V	5871	4633	4133	2573	1699	1050	719.9	584.5	492.5	325.3	291.6	150.7
10.8V	5347	4270	3820	2512	1677	1042	711.8	564.8	490.2	323.9	288.7	149.2
11.1V	4697	3861	3439	2443	1652	1003	699.9	556.7	488.4	321.6	285.6	143.9

All mentioned values are average values (Tolerance ±2%).

Effect of temperature on long term float life

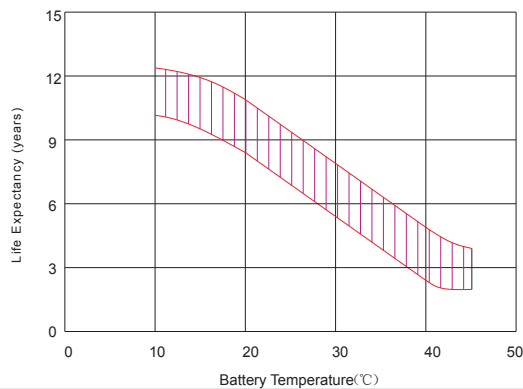

Storage characteristic


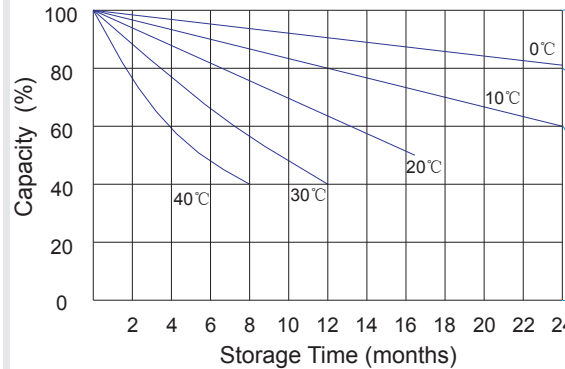


Supplementary charge required (Carry out supplementary charge before use if 100% capacity is required)

Supplementary charge required before use. This supplementary charge will help to recover the capacity and should be made as early as possible.

Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this state is reached

Supplementary charge and storage guidelines

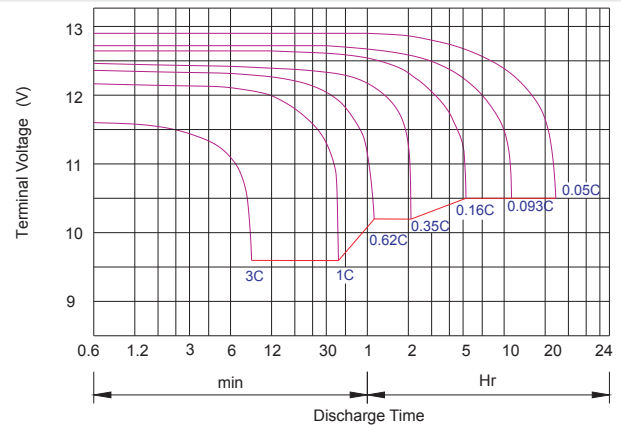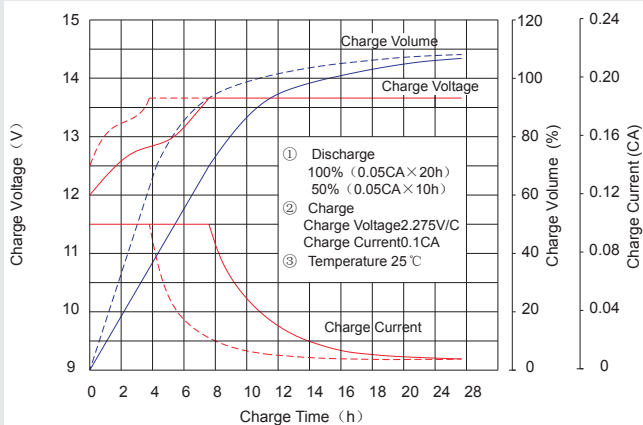

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Charge the batteries at least once every six months, if they are stored at 25 C. °

Charging Method:

Constant Voltage	-0.2Cx2h+14.4-14.7Vx24h, Max. Current 0.3C
Constant Current	-0.2Cx2h+0.1Cx12h
Fast	-0.2Cx2h+0.3Cx4h

Bolt	M5	M6	M8
Terminal	F3 F4 F13 F18 T25 T26	F8 F11 F12-1 F15	F5 F9 F10 F12 F14 F16
Torque	6~7N·m	8~10N·m	10~12N·m

Maintenance & Cautions

Float Service:

※ Every month, recommend inspection every battery voltage.

※ Every three months, recommend equalization charge for one time.

Equalization charge method:

Discharge: 100% rate capacity discharge.

Charge: Max. current 0.3CA, constant voltage 14.4-14.7V charge 24h.

※ Effect of temperature on float charge voltage: -3mV/°C/Cell.

※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.