



Category 5e (350 MHz) U/UTP Cables



STANDARD

- ANSI/TIA-568-C.2 Category 5E
- ISO/IEC 11801:2017 Class D
- EN 50173-1 Category 5E
- ICEA S-90-661 Category 5E
- EN 50288-3-1, NEMA WC 63.1
- IEC 61156-5, ASTM D4566-98, IEC 60332-1-2
- UL Listed CM, CMR, CMP and LSZH
- ETL and 3P Verified to TIA-568-C.2 CAT 5E
- UL E197771, INTERTEK, RoHS Compliant

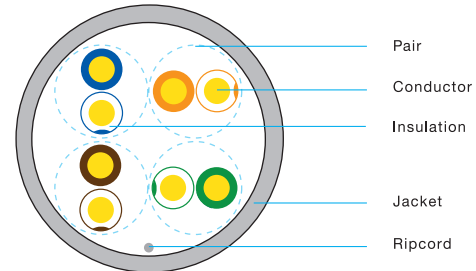

APPLICATION

- 1000 BASE-T (IEEE 802.3ab Gigabit Ethernet)
- 100 BASE-TX (IEEE 802.3u Fast Ethernet)
- 10 BASE-T (IEEE 802.3 Ethernet)
- 155/622Mbps and 1.2Gbps ATM
- 4/16 Mbps Token Ring
- POE, POE+ (IEEE 802.3af, IEEE 802.3at)
- TP-PMD, TPDDI, ISDN, VoIP
- Analog & Digital Voice, Digital & Analog Video

ELECTRICAL CHARACTERISTICS

Impedance	: 100±15Ω, 1 MHz to 350 MHz
Mutual Capacitance	: 5.6 nFMax / 100m
Capacitance, Unbalance	: 160 pF Max / 100m
DC Resistance	: 9.38 ohm Max/100m
DC Resistance, Unbalance	: 5% Max.
Insulated Resistance	: 5000 MΩ/Km
Dielectric Strength	: 1kV/min
Propagation Delay	: 536 ns/100m Max @350MHz
Delay Skew	: 25 ns Max

CONSTRUCTION / MATERIAL

Conductor	: 24AWG Solid/Stranded Bare Copper
Insulation	CM, CMR, LSZH : HDPE CMP : FEP
Ripcord	: Under Jacket
Jacket	CM, CMR : FR-PVC CMP : FR-PVC (Low Smoke) LSZH : FR-LSZH

FREQUENCY (MHZ)	INSERTION LOSS (dB/100m)	NEXT MIN.(dB)	ACR-N MIN.(dB)	PS NEXT MIN.(dB)	PS ACR-N MIN.(dB)	ACR-F MIN.(dB/100m)	PS ACR-F MIN.(dB/100m)	RL MIN.(dB)
1	2.0	77	75	75	73	68	65	20.0
25	9.5	56	46.5	54	44.5	40	37	24.3
31.25	10.7	55	44.3	53	42.3	38	35	23.6
62.5	15.4	50	34.6	48	32.6	32	29	21.5
100	19.8	47	27.2	45	25.2	28	25	20.1
155	25.3	44	18.7	42	16.7	24	21	18.8
200	29	43	14	41	12	22	19	18.0
250	32.8	41	8.2	39	6.2	20	17	17.3
300	36.6	40	3.4	38	1.4	18	15	16.8
350	40	39	-	37	-	17	14	16.3

MECHANICAL PROPERTIES

Minimum Bending Radius	Install : 8 X Cable Diameter After Install : 4 X Cable Diameter
Tensile Strength	110 N (25lbf)
Ultimate Breaking Strength	>400 N (90lbf)
Installation / Operating temperature	-20°C to 60°C
Storage Temperature	-20°C to 80°C

Part No.	UL/NEC Flame Rating	Conductor	Jacket	Diameter (mm.)	Color	Packaging
US-9015	CMR	24AWG Solid Bare Copper	FR-PVC	5.3	White	305m/Pull Box
US-9015LSZH	LSZH	24AWG Solid Bare Copper	FR-LSZH	5.3	White	305m/Pull Box
US-9015P	CMP	24AWG Solid Bare Copper	FR-PVC (LS)	5.3	White	305m/Pull Box
US-9015CM	CM	24AWG Solid Bare Copper	FR-PVC	5.3	White	305m/Pull Box
US-9025	CM	24AWG Stranded Bare Copper	FR-PVC	5.4	White	305m/Pull Box
US-9015-1	CMR	24AWG Solid Bare Copper	FR-PVC	5.3	White	100m/Color Box